


# PixelArc R

series K2  
(head only – XLR indoor or Cable/Conduit Outdoor)



## ACCESSORIES

- 10° Light Shaping Diffusion kit
- 20° Light Shaping Diffusion kit
- 30° Light Shaping Diffusion kit
- 40° Light Shaping Diffusion kit
- 60°x1 linear Light Shaping Diffusion kit
- 1x60° linear Light Shaping Diffusion kit

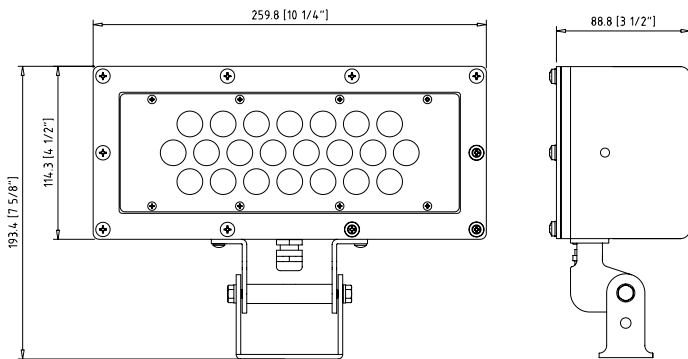

## Features

- Indoor rated only when using XLR connections to controller
- 22 red, green, blue, amber or white high intensity K2 Luxeon emitters
- Highest quality color binning
- Custom LED arrays available by request
- LED beam angle 8° full angle (other angles available upon request)
- Extensive color palette

## Cooling

- Convection cooled via a substantial heat sink

## Finish

- Powder coated black standard (other colors to order at an additional cost)

## Weight

- 7.5lbs (3.4kgs)

## Dimensions

- 10.3" (260mm) length x 3.5" (89mm) width x 7.5" (193mm) height

## Electrical

- 2.2 amps at 24V DC at full intensity
- 10' (3M) trailing leads with 6 pin xlr
- Pinout details:
- Pin1 – 24v (white and gray)
- Pin2 – red (red)
- Pin3 – green (green)
- Pin4 – blue (blue)
- Pin5 – amber/white (yellow)
- Pin6 – not used

## (head only) with 6 Pin XLR

- PX-6BOX-XLR (indoor only rated unit – uses 6 pin XLR to power heads)
- PX-6BOX-H1 (Outdoor rated unit – Hardwired uses cable or conduit)

## UL LISTING

Arc R head w/6 pin XLR (use with PX-6BOX-XLR)  
part code suffix with -XLR is Entertainment (not UL listed)

Arc R head w/CAB or CON (cable or conduit) use with PLA-6BOX-H1 (wet) or H2 (dry) is UL listed file #E3111314

note: UL listed fixtures are hard wired only, generally for permanent installations